



# PAYLOADER



Shown With Options

**RATED CAPACITY**  
up to **5,200 lbs.**

**UP TO 4 PASSENGERS**

**RANGE**  
up to **30 miles**

**TOW**  
up to **14,000 lbs.**

Versatility is the Payloader's middle name. Choose from standard rated capacities that range from 2,400 to 5,200 lbs. And if you need to tow, the Payloader has you covered all the way up to 7 tons.

Maintenance-free batteries, van bodies, operator cabins and folding side rails are just the beginning of a very long list of available options.

Need to carry or tow more? Have a unique application requirement? Don't worry! Columbia has been building Payloaders for more than 60 years. Just let us know what you need and we'll build it.



- 1 Overhead Rack
- 2 Optional 2nd Row Seating
- 3 Multiple Hitches Available



**COLUMBIA**


# BUILT FOR WORK



# PAYLOADER

## Dimensions

Step Height:	16.5 in.
Load Bed Height:	29 in.
Ground Clearance:	4.5 in.

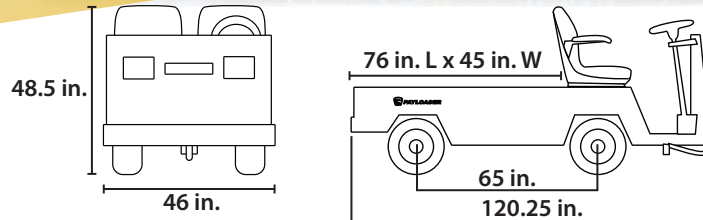

## Performance

	BC2	BC3	BC4
Max Speed Forward:	14 MPH	13 MPH	12 MPH
Turning Radius:	Curb to curb - 264 in.   Intersecting aisle - 92 in.		
Range <sup>1</sup> :	Up to 30 miles		

## Weight & Capacity

	BC2	BC3	BC4
Vehicle Weight :	1,690 lbs.	1,720 lbs.	1,850 lbs.
Rated Capacity <sup>2</sup> :	2,400 lbs.	3,200 lbs.	4,200 lbs. up to 5,200 lbs.
Towing Capacity:	6,500 lbs.	10,000 lbs.	10,000 lbs. up to 14,000 lbs

## Power Train

Motor:	NEMA class H temperature rated separately excited motor		
Horsepower:	15.3 HP @ 1750 rpm	17.3 HP @ 1975 rpm	15.3 HP @ 1750 rpm
Batteries:	Eight 6 volt, heavy duty, 232 amp hour deep cycle		
Charger:	Built-in, micro-processor control, fully sealed, anti-drive away interlock, 110-240 VAC, 50 / 60 HZ		
Controller Type:	Programmable, solid state, reduced speed reverse with diagnostic LED & calibrator interface		
Controller Rating:	400 amp	400 amp (500 amp option)	
Motor Braking Mode:	Regenerative and pedal proportional braking with top speed limiting		
Directional Control:	Dash-mounted safety directional keyswitch		
Drive Unit/Differential:	Direct drive, oil bath, helical gears, 10.37:1	Direct drive, oil bath, helical gears, 16.77:1	Chain drive, oil bath, helical gears, 12.52:1 final drive ratio

## Body

Passenger Capacity:	Two with up to four (optional 2nd row seat)
Seating:	Adjustable bucket seats with arm rests
Body:	Welded heavy duty; 12-gauge structural steel smooth plate body
Lighting:	Dual recessed head; tail and brake lights
Accessories:	Battery discharge indicator; horn; reverse warning alarm; driver seat power interlock switch Composite deck board with high density polyethylene overlay

## Chassis

Frame:	10 Gauge Steel	
Steering:	Automotive steering wheel to heavy duty worm and roller gear	
Brakes:	Dual, rear hydraulic drum, hand operated parking brake w/Interlock	4 Wheel, hydraulic brakes w/10" front rotors, hand operated parking brake
Suspension:	Independent leaf springs	
Tires:	5.70" x 8", pneumatic, 8-ply rating, load range D	5.0" x 8", pneumatic, 10-ply rating, load range E

Features, options, specifications, color availability and model designation are subject to change without notice. Some vehicles are pictured with options that may be available at extra cost or may not be available on some models. Ask your dealer about the availability of options and verify that the vehicle you order includes the equipment you require.

<sup>1</sup> Range will vary depending on temperature, grade, payload and driving style. | <sup>2</sup> Rated Capacity Includes personnel, cargo, options and accessories.

All specifications are subject to change without notice.

*Columbia Vehicle Group, Inc.*

A Nordic Group Company | Business Ventures Since 1947

1115 Commercial Ave. Reedsburg, WI 53959  
columbiavehicles.com



**COLUMBIA**



**TOMBERLIN**